


How to replace a rear wheel hub on Mitsubishi Colt Z30

Carry out replacement in the following order:

1

Place wedge blocks under the front wheels.

2

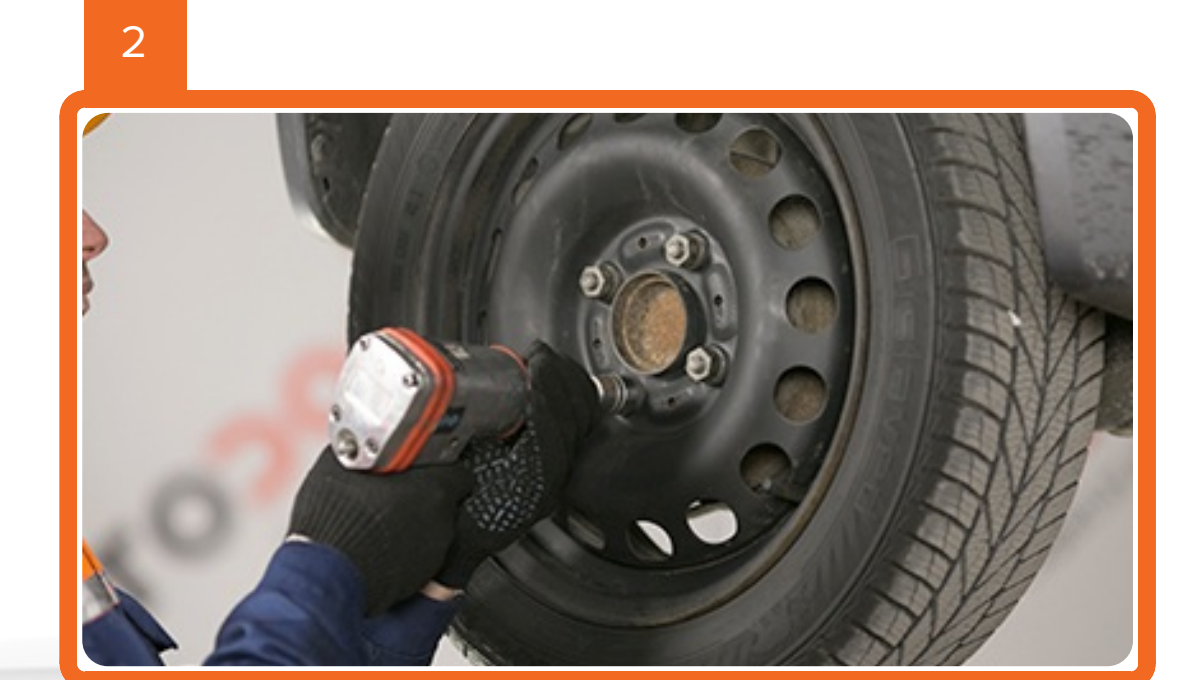

Loosen the wheel mounting bolts.

3

Raise the rear of the car and secure on supports.

4



Remove the rear wheels.

5


Fully lower the parking brake lever.

6




Remove the brake drum

7.1

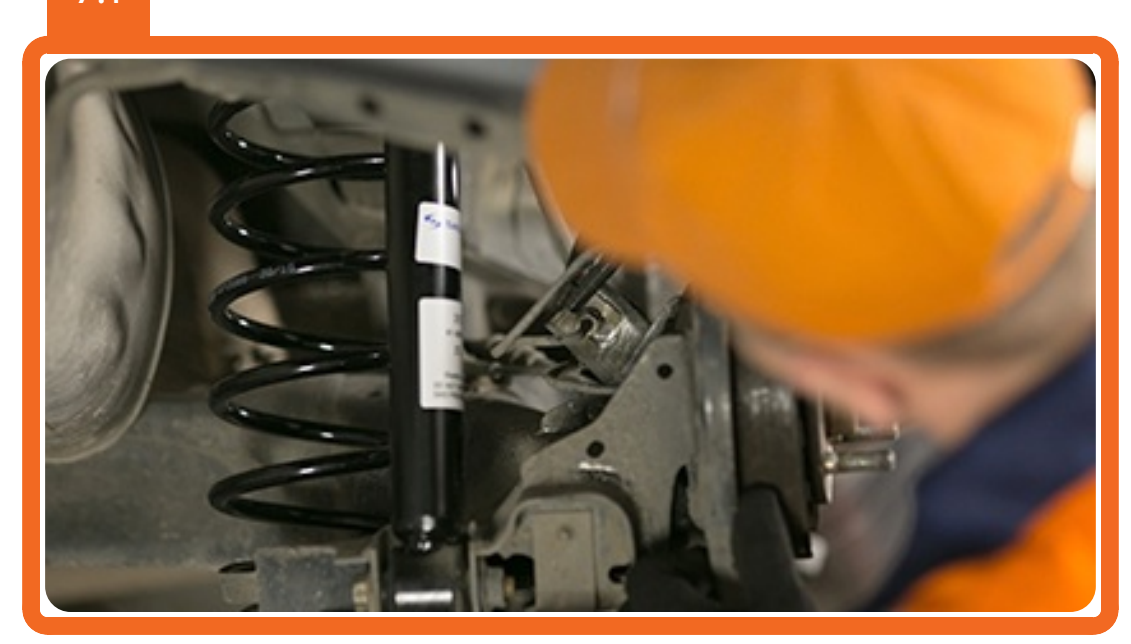


Disconnect the brake hose clamp.

7.2

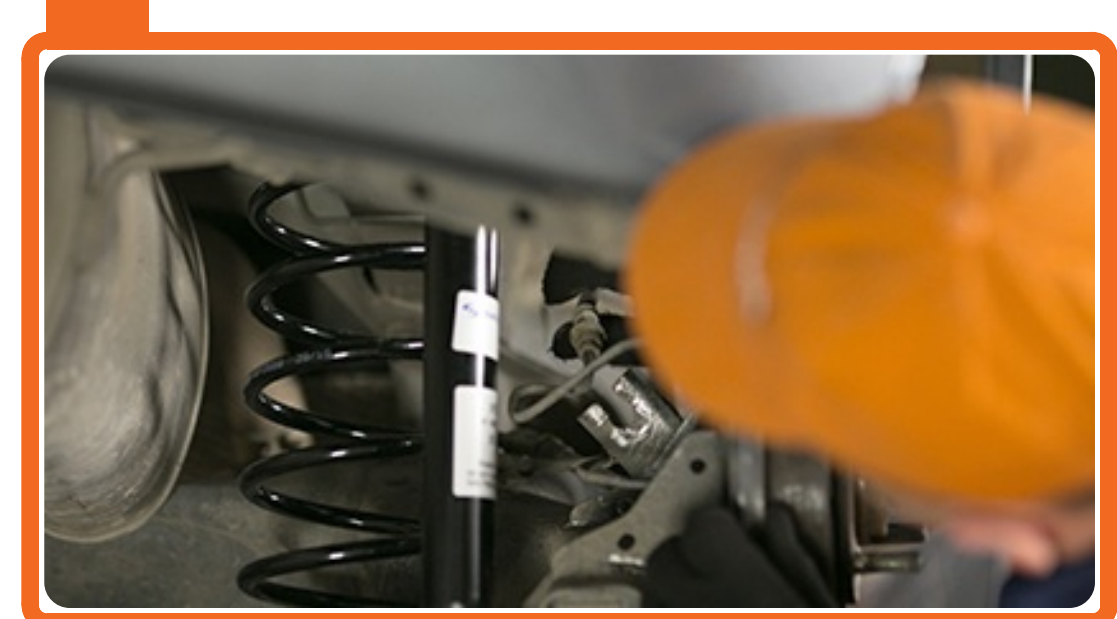

8.1

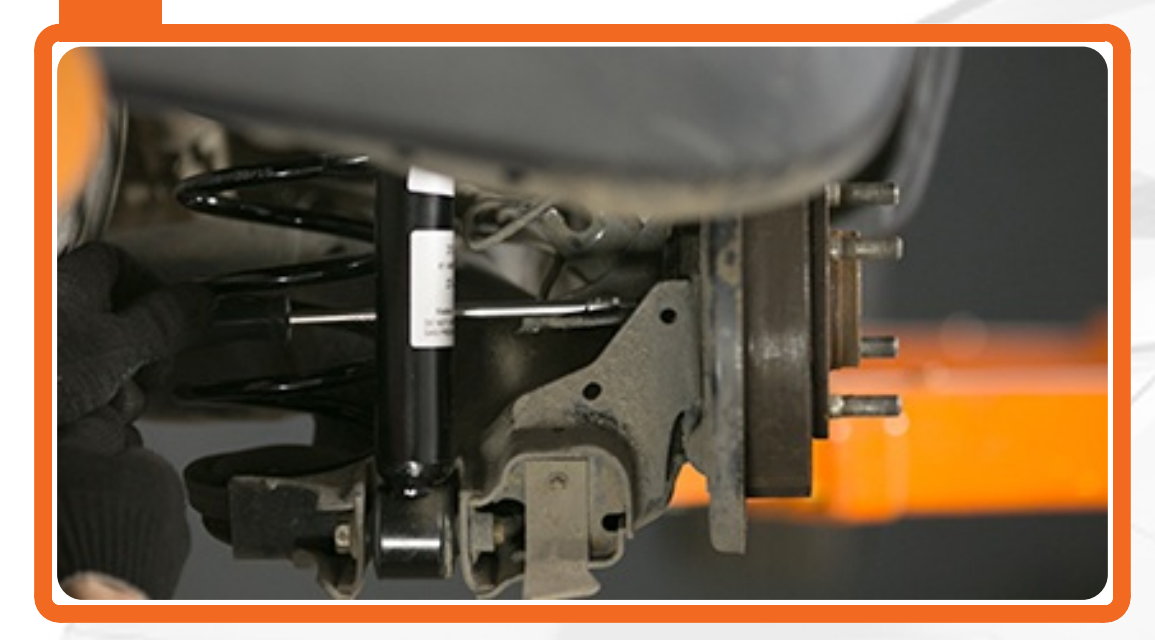

Unscrew the bolts of the rear wheel hub.


8.2



8.3



9

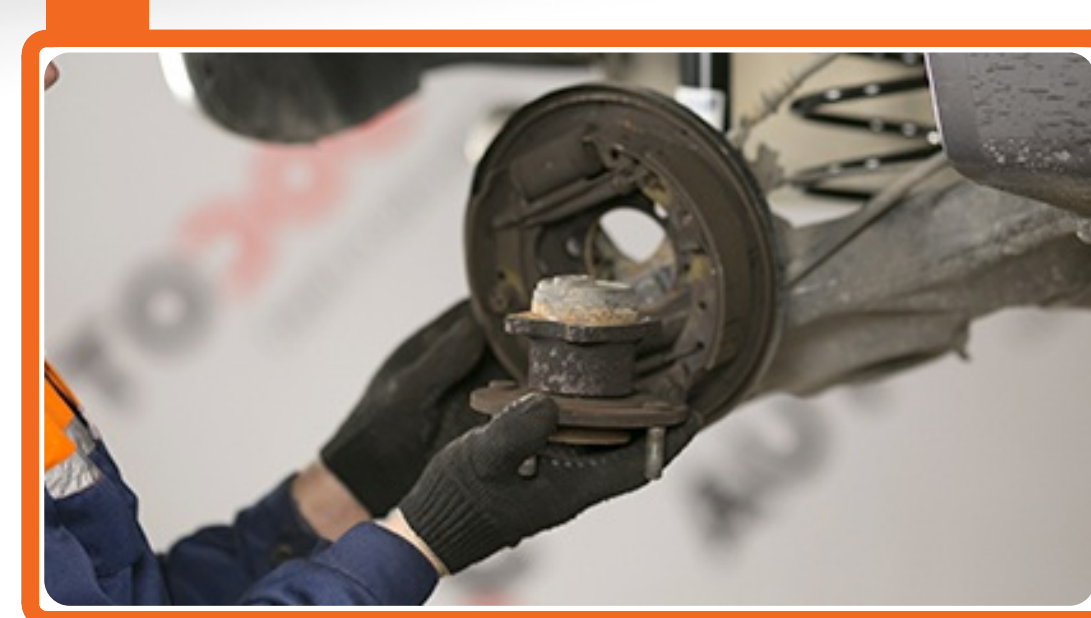

Remove the hub and the bearing together, since they are a sealed unit.




10.1



Install the new wheel hub with a bearing.

10.2

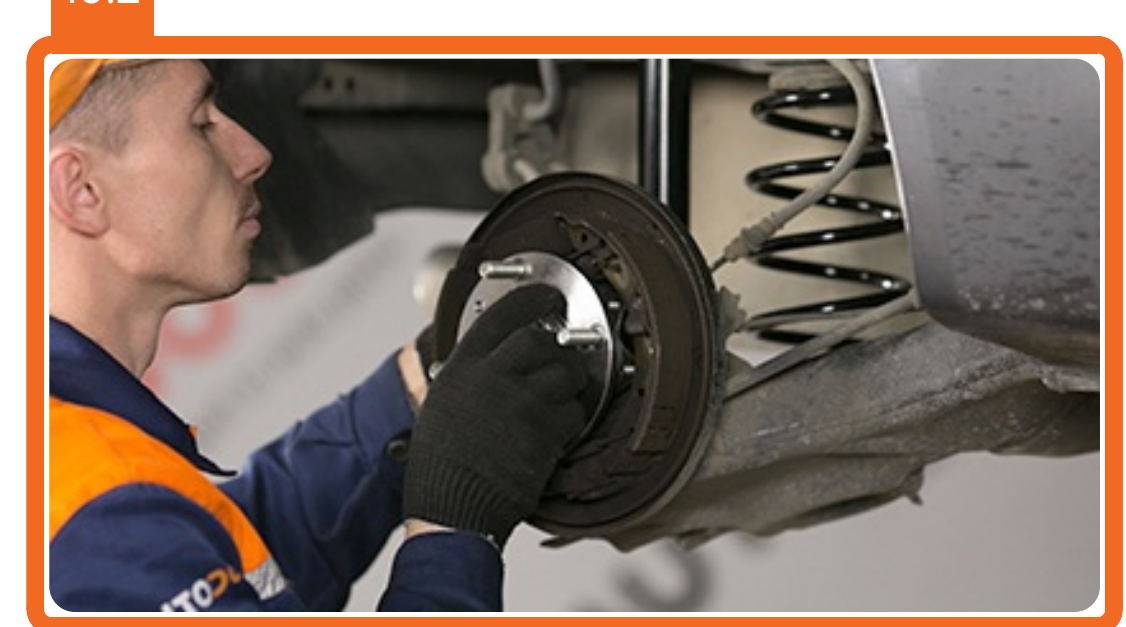

11.1



Tighten the hub.

11.2



11.3




12



Install the brake hose clamp.




13

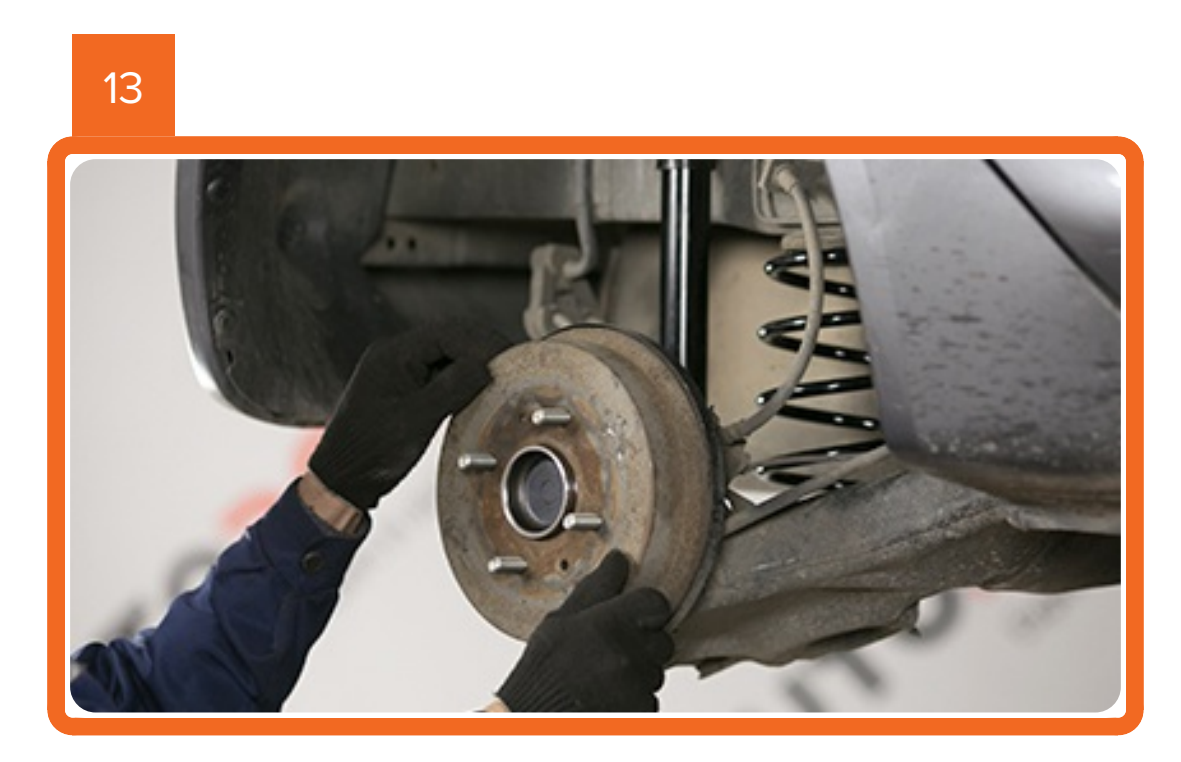


Install a brake drum.

14

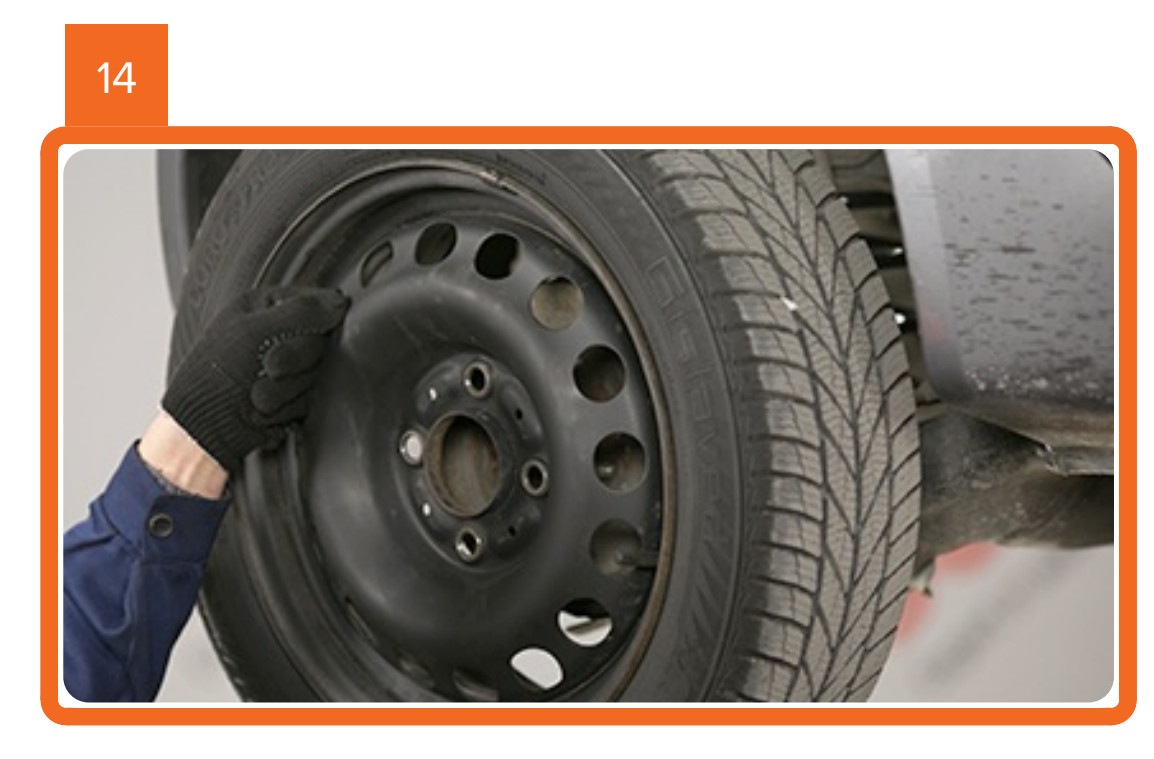

Install the wheel.

15

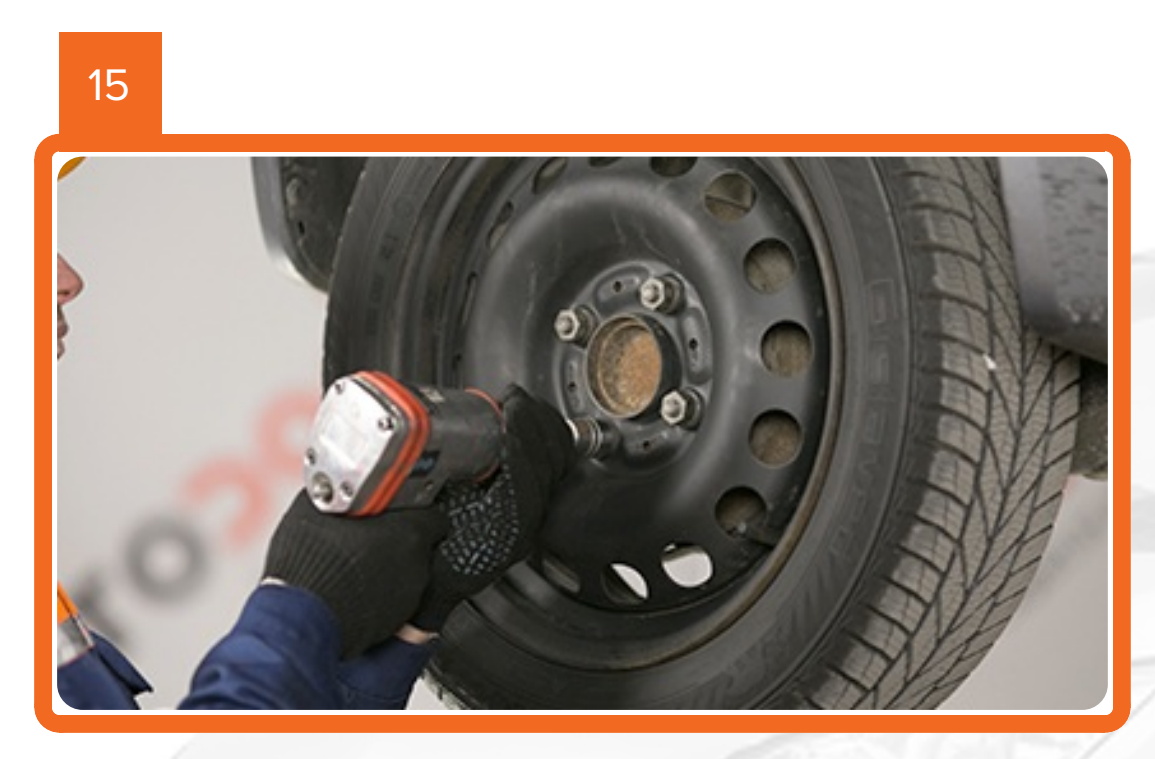

Lower the car and working in a cross order, tighten the wheel bolts.



We hope that this information have been useful for you!



Video tutorials

Watch our detailed video guides about your Mitsubishi Colt Z30 repair on our youtube channel. Watch video guides.

AutoDoc online


Highest quality wheel/hub bearing kits for your car Mitsubishi Colt Z30 are available on AutoDoc. Go to the website.

AUTODOC — TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

QUALITY AUTO PARTS



MITSUBISHI

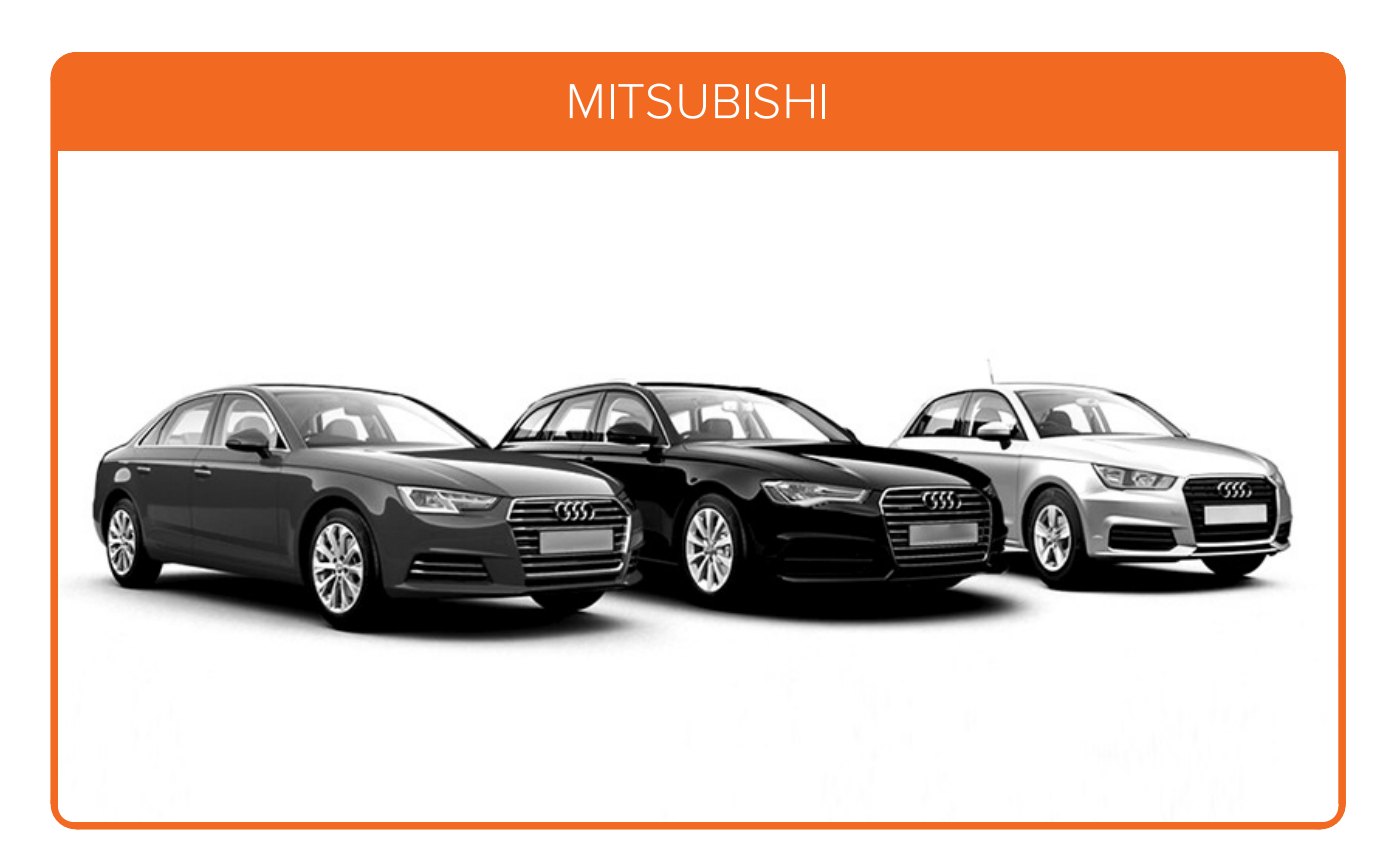


WHEEL/HUB BEARING KITS



MITSUBISHI COLT Z30



WHEEL/HUB BEARING KITS FOR MITSUBISHI

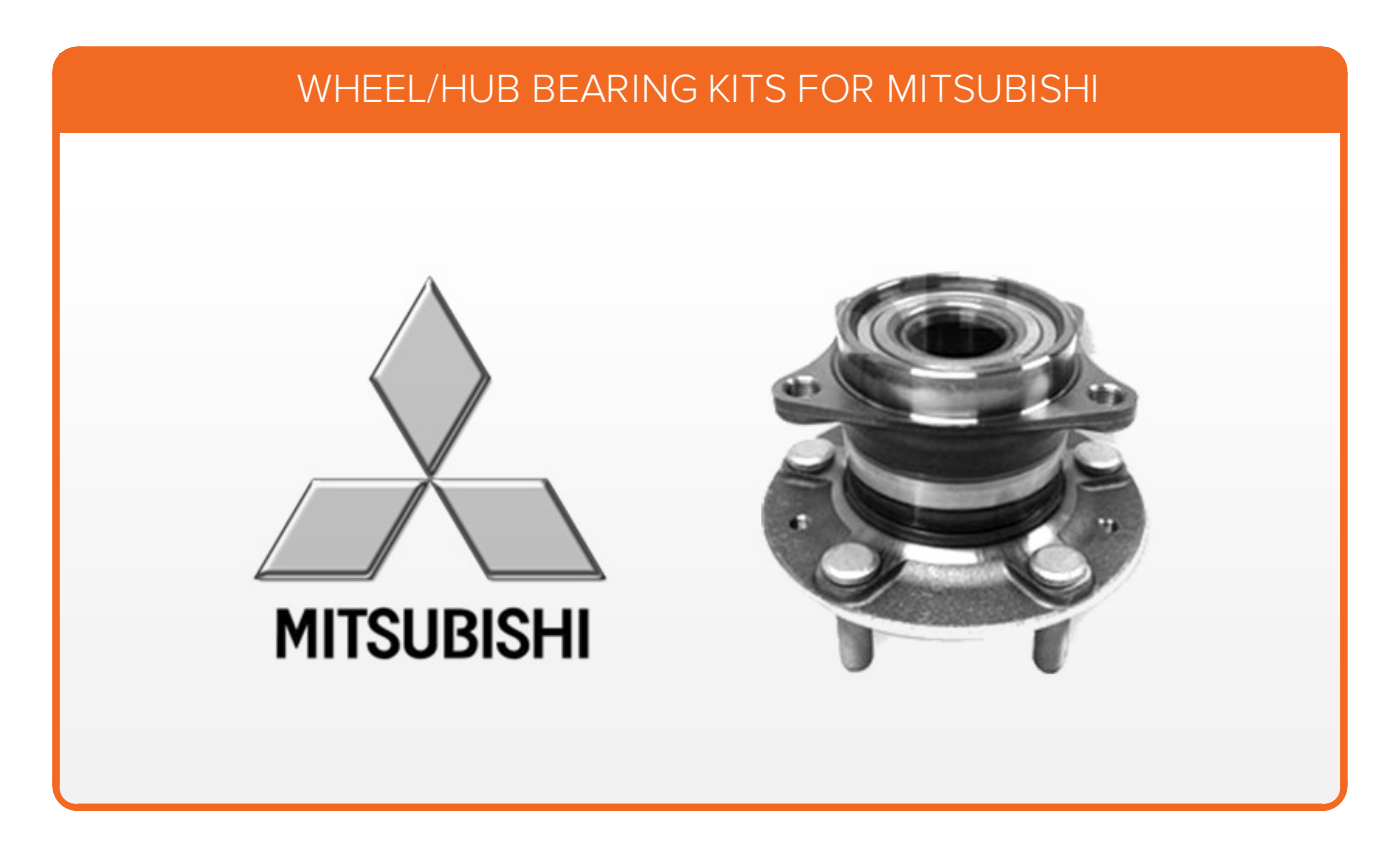

WHEEL/HUB BEARING KITS FOR MITSUBISHI COLT Z30



Disclaimer:

The document contains only general recommendations that may be useful for you when you perform repair or replacement works. AutoDoc shall not be liable for any loss, injury, damage of property, acquired in the repair or replacement process due to incorrect usage or misinterpretation of the provided information.

AutoDoc shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for informative purposes only and cannot replace advice from specialists.

AutoDoc shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AutoDoc strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.